Flow over an Airfoil - Physics Setup

Author: Benjamin Mullen, Cornell University

Problem Specification
1. Pre-Analysis & Start-Up
2. Geometry
3. Mesh
4. Physics Setup
5. Numerical Solution
6. Numerical Results
7. Verification & Validation
Exercises
Comments

Physics Setup

Launch the Solver

In this step, we will open fluent and define the boundary conditions of the problem. If you haven't already, close the meshing window to return to the Project

Outline window. Now, click open. Check the box marked Double Precision. To make the solver run a little quicker, under Processing Options we will select Parallel and change the N umber of Processes to 2. This will allow users with a double core processor to utilize both.




Select the Solver

Click *OK* to launch Fluent. The first thing we will do once Fluent launches is define the solver we are going to use. Select *Problem Setup > General*. Under *Solver*, select *Density-Based*.

Models and Materials

Next, we will define the model we are going to use. We do this by going *Problem Setup > Models > Viscous-Laminar*. Then press *Edit...* This will open the *Viscous Model* Menu Window. Select *Inviscid* and press *OK*. Now, we will specify characteristics of the fluid. Because we specified the fluid as inviscid, we will only have to define the density of the fluid. To make matters even simpler, we are only looking for non-dimensionalized values like pressure coefficient, so we will define the density of our fluid to be 1 kg/m^3. To define the density, click *Problem Setup > Materials > (double click) Air*. This will launch the *Create/Edit Materials* window.

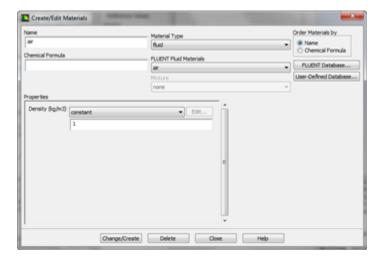


Under Properties, ensure that density is set to Constant and enter 1 kg/m^3 as the density. Click Change/Create to set the density.

Boundary Conditions

Inlet

Now that the fluid has been described, we are ready to set the boundary conditions of the simulation. Bring up the boundary conditions menu by selecting *P* roblem Setup > Boundary Conditions. In the Boundary Conditions window, look under Zones. First, let's set the boundary conditions for the inlet. Select *I* nlet to see the details of the boundary condition. The boundary condition type should have defaulted to velocity-inlet. If it didn't, select it. Now, click Edit to bring up the Velocity-Inlet Window. We need to specify the magnitude and direction of the velocity. Select Velocity Specification Method > Components. Remember, we want the flow to enter the inlet at an angle of 6 degrees since the angle of attack of the airfoil is 6 degrees; thus, the x velocity will bet'll is 5, specify X-Velocity as 0.9945 m/s and Y-Velocity as 0.1045 m/s. When you have finished specifying the velocity as entering the inlet at 6 degrees (the same thing as having an angle of attack of 6 degrees), press OK

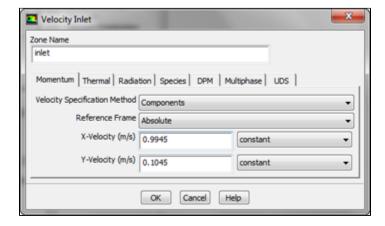

Outlet

In the Boundary Conditions window, look under Zones. Select Outlet to see the details of the boundary condition. The boundary condition type should have defaulted to pressure-outlet: if it didn't, select it. Click Edit, and ensure that the Gauge Pressure is defaulted to 0. If it is, you may close this window.

Airfoil

In the Boundary Conditions window, look under Zones and select airfoil. Select Type > Wall if it hasn't been defaulted.

Reference Values

The final thing to do before we move on to solution is to acknowledge the reference values. Go to *Problem Setup > Reference Values*. In the *Reference Values* Window, select *Compute From > Inlet*. Check the reference values that appear to make sure they are as we have already set them.

Go to Step 5: Numerical Solution

Go to all FLUENT Learning Modules