

Foam Filtration Reflection Report 2

Foam Filtration Reflection Report

Primary Authors:

Kevin Wong

Catherine Hanna

Leila Zheng

Melissa Shinbein

Sarah Stodter

Primary Editor:

Sarah Stodter

AguaClara Reflection Report

Cornell University

School of Civil & Environmental Engineering

Ithaca, NY 14853-3501

Date Submitted: 09/07/2010

Abstract

The objective of the foam filtration team is to design a foam filtration unit that can reliably treat the typical AguaClara effluent water with a turbidity of about 5 NTU to a turbidity of less than 1 NTU. To characterize the performance of 90 ppi polyurethane foam, certain variables were held constant while others were varied in order to find the optimal parameters for foam filtration. Previously, we have conducted experiments that varied the flow rates and depths of the filtration unit. An experiment utilizing aluminum hydroxide as a pre-treatment for the foam was also conducted. We propose to continue our performance study of the foam by varying flow rates, depths, and turbidities.

Introduction

Currently, the Foam Filtration Team is conducting a performance study of the foam apparatus. The goal of the team is to reach optimal filtration levels, resulting in the lowest NTU level possible. In order to do so, all possible variables are being tested. These variables include: water velocity (mm/s), turbidity (NTU), depth of foam (in), alum dose (present or not), and possibly introducing an Aluminum Hydroxide /Sodium Carbonate wash. The water velocity and turbidity, where 5 NTU is the output for raw water from the average AguaClara plant, vary in order to test the foam's effectiveness at various speeds and elevated levels of contamination. These two variables are controlled by the user in a program called Process Controller. Meanwhile, varying foam depth is used to find the least amount of foam used with the best NTU output. Foam depth can be changed by adding more 1 inch foam layers into the tube. The presence of alum currently exists in all AguaClara plants. However, were the foam to prove effective without the alum, it would result in less chemicals being ingested by plant users. Finally, the wash aims to add an extra boost to the filtration process. By pre-soaking the foam in the wash, the chemicals may prove useful in removing extra clay.

Experimental Design

Our
last
“Foam
Filtrati
on
Reflect
ion
Report
”

thorou
ghly
detaile
d the
basic
experi
mental
setup.
Howev
er,
over
the
last
two
weeks,
a few
things
have
change
d in
regards
to the
overall
design.
First,
a
second
setup
was

added
so that
two
experi
ments
can be
runnin
g at
the
same
time.
This
will
allow
us to
test
and
obtain
data
for
each
of our
foam
filtrati
on
scenari
os
(using
differe
nt
combi
nations
of
flow
velocit
y,
foam
depth,

alloy
coating
, etc.)
at a
faster
pace.
In
additio
n, we
could
choose
to run
one
certain
experi
ment
on
both
of the
setup
station
s at
the
same
time.
This
would
provid
e us
with
two
sets of
data
for the
same
experi
ment,
which

will
ultimat
ely be
benefic
ial in
our
final
report
and
data
analysi
s by
showin
g
consist
ency
and
accura
cy.

Because of the addition of a new experimental station, a third computer was added in order to monitor the turbidity of the second experiment.

In summary, two computers are currently monitoring the turbidity

y of
the
effluen
t for
both
runnin
g
experi
ments,
while
one
compu
ter
monito
rs the
turbidit
y of
the
raw
water
(the
influen
t for
both
experi
ments).

One
week
ago,
our
team
attempted to
coat
the
foam
sponges with
alloy.

For
the
first
attempt, the
sponges
soaked
in the
alloy
solution for
approximately 10
minutes.

Afterwards,
the
sponges were
taken
out
one-

by-
one
and
immed
iately
placed
in the
filtrati
on
tube.

As
they
were
being
lowere
d into
the
filtrati
on
cylinde
r,
most
of the
alloy
solutio
n was
presse
d out
of the
sponge
s due
to
even
the
slighte
st
pressur
e.

After
the
experiment
was
completely
set up
and
ready
to run,
a
noticeable
layer
of
alloy
had
begun
to
form
on the
very
top of
the
sponge
stack
as the
suspended
particles that
had
been
pressed out
of the
sponge

s were
beginn
ing to
fall
and
rest.

The
second
attempt
at
coating
began
with
soaking
the
sponges
in
alloy
for
approximately
10
minutes
again.

This
time,
once
the
sponges
were
taken
out of
the
alloy
solution, they
were
squeezed
in
the
sink
and
set

aside
to dry
for
around
one
minute
. They
were
then
lowered
into
the
filtrate
on
tube
and it
was
noticeable
that
less
alloy
was
being
pressed out
of the
sponges.
s.

Neither
r
experiment,
however,
fared
very
well.
The
alloy-
coated
foam
filtration
unit
had
almost
no
significant
improvements
in
filtering
performance
as
compared to
the
experiments
done
without
coating

. Our
team
is
current
ly
trying
to
researc
h
metho
ds for
coating
properl
y and
succes
sfully.
At this
time,
our
best
sugges
tion
remain
s at
letting
the
alloy-
soaked
sponge
s sit
and
dry
for at
least
one
full
day.

We
also
decide
d to
take
out
the
pressur
e
sensor
in the
experi
ments
becaus
e it
was
not
measur
ing
the
pressur
e
correct
ly and
was
therefo
re
giving
inaccur
ate
data.
Appare
ntly,
the
pump
was
creatin
g a

large
differe
nce in
pressur
e, so it
was
hard
to
determ
ine the
actual
head
loss of
the
individ
ual
experi
ments.
When
the
pump
rotor
made
a full
rotatio
n, the
pressur
e
readin
gs
spiked
to
~400
cm
head
loss,
wherea
s the

actual
head
loss
for
each
experi
ment
should
stay
consist
ently
around
1 cm.
We
are
present
ly
discuss
ing
metho
ds of
fixing
this
proble
m as
well.
One
idea
focuse
s on
adding
an
attenua
tor (or
someth
ing
similar
) in

order
to
allow
for
accurat
e head
loss
measur
ements
.

Results and Discussion

A number of problems have occurred in the past 2 weeks which have given us inaccurate data. For example, we ran an experiment in which we soaked the foam in an aluminum hydroxide sodium carbonate solution. The experiment was conducted with a downflow velocity of 6mm/s with 10 inches of foam depth. We expected the results from this experiment, shown in figure 1, to be better than our previous experiment in which we do not pre soak the filters, and otherwise same conditions, shown in figure 2. However, as shown by comparing figure 1 and figure 2, this was clearly not the case—we suspect the turbidimeter was not working properly, and have thus replaced it.

□

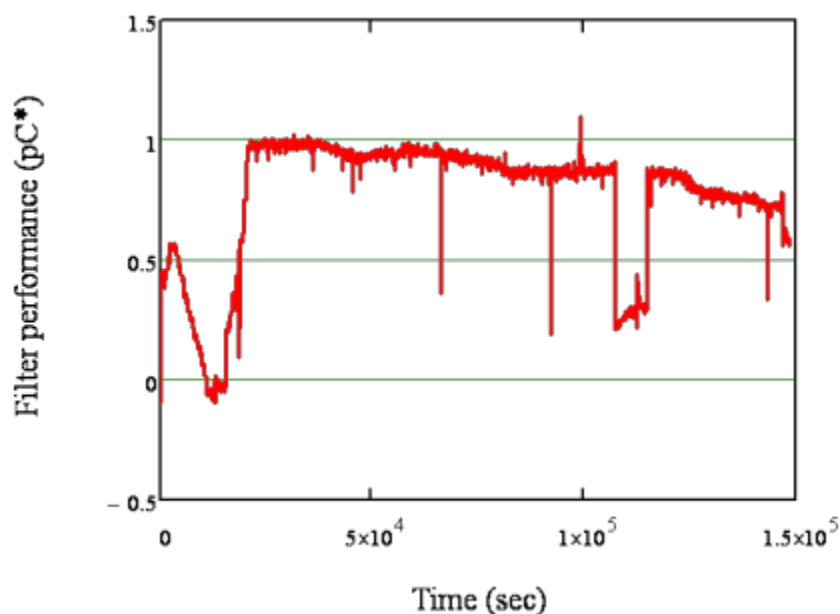


Figure 1. Aluminum Hydroxide Sodium Carbonate Filter Presoak, 6mm/s, 10 inch depth, 1.5 mg/L alum dose, 5 NTU

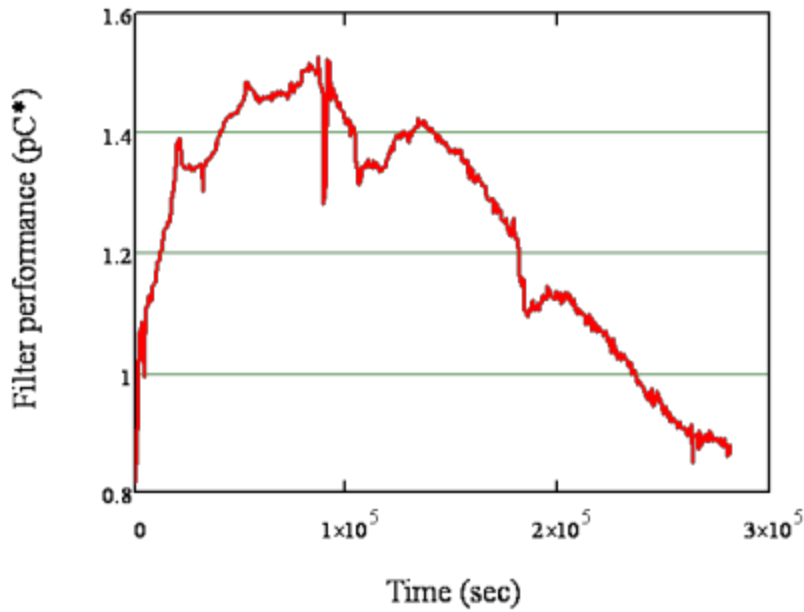


Figure 2. No Filter Presoak, 6mm/s, 10 inch depth, 1.5 mg/L alum dose, 5 NTU

In addition, it was discovered that the raw water turbidimeter had become clogged with a large amount of algae, and the data for the 15 inch depth filter with a downflow velocity 6mm/s, 5 NTU raw water experiment may not have been accurate due to this clog. We are currently rerunning this experimental trial to confirm the results. This data, along with the data for a 5 and 10 inch filter depth can be seen in figure 3. Figure 3 clearly shows that performance increases with increased filter depth. However, it is not directly linear according to depth, as according to the Iwasaki relationship for deep bed filters, where:

In which C is the particle concentration, C_0 is the initial filter coefficient, z is the media depth. Again, the 15 inch filter depth experiment is currently being rerun to determine whether these results are accurate.

□

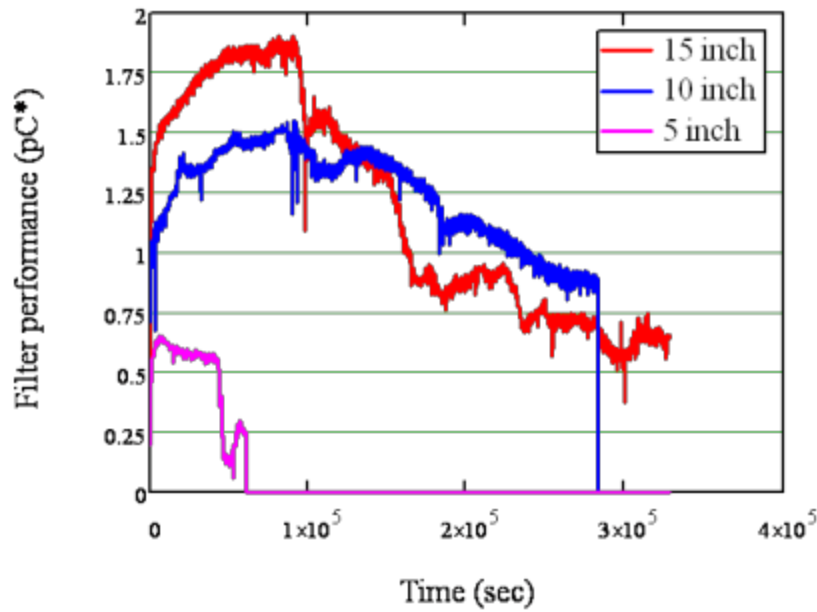


Figure 3. pC* vs Time for 15, 10, and 5 inch filter depths at 6mm/s downflow velocity, 5 NTU, 1.5 mg/L alum dose

Despite the questionability of the actual influent NTU (we suspect that the actual raw water NTU could have been higher, but not lower), the data for the 15 inch column is nonetheless promising for filtration. As indicated in Figure 4, both the 10 inch and 15 inch columns were below the US EPA standards of .3 NTU for about 45 hours, and below our goal of 1 NTU for about 80 hours. This run time is very promising, especially given the high filtration velocity in comparison to rapid sand filtration, where filtration velocities are typically 0.7- 2.8mm/s.

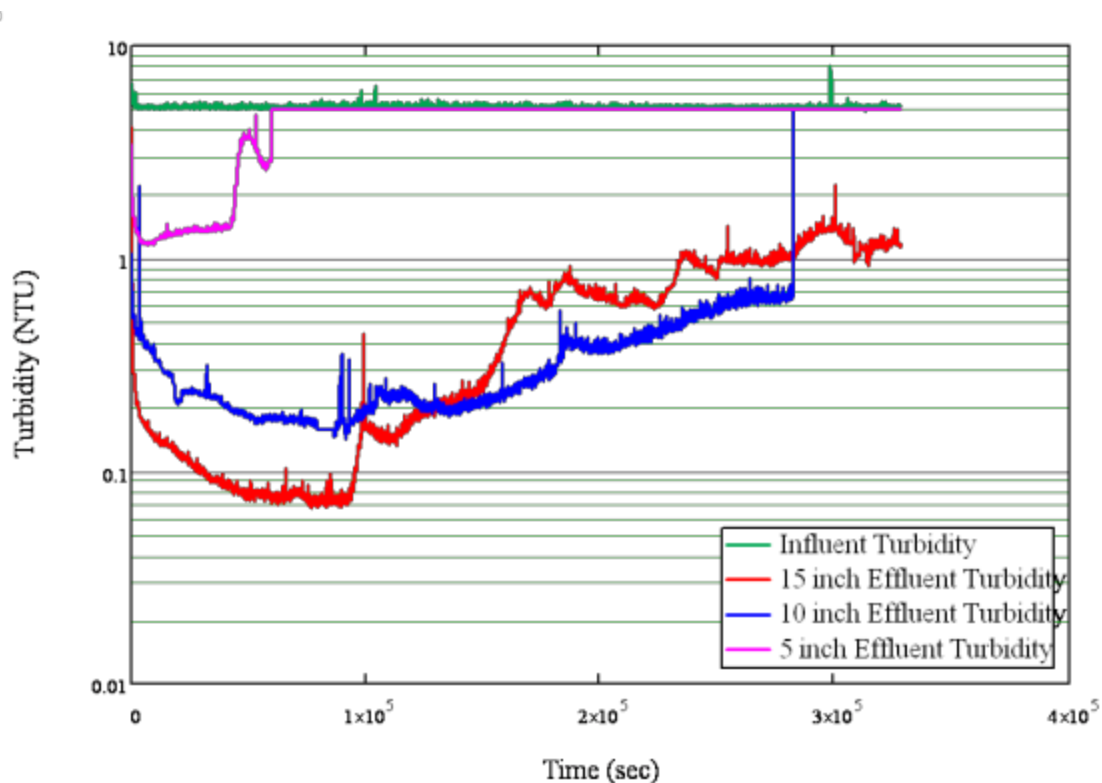


Figure 3. Effluent Turbidity vs Time for 15, 10, and 5 inch filter depths at 6mm/s downflow velocity, 5 NTU, 1. 5 mg/L alum dose

Future Work

We will continue performing experiments to characterize the performance of polyurethane foam. Like before, different variables will be varied while holding others constant in order to determine the optimal parameters for the foam filtration unit. For the next two weeks, we are likely to perform experiments that vary the flow rates and depths of the filtration unit. If time permits, we can also run experiments with varying turbidities (increasing the turbidity from 5 NTU to 10 and 15 NTU). We will be performing data analysis on the results of our experiments and uploading our work on the online wiki.

The experiments bolded in the table below are those that we propose to conduct for the next two weeks.

	Velocity(mm /s)	Turbidity (NTU)	Depth (in)	Alum Dose	Done?	Started	Finished
Vary Flow:							
Experiment 1	6	5	10	1	YES	10-Jun	13-Jun
Experiment 2	12	5	10	1	YES	14-Jun	16-Jun
Experiment 3	18	5	10	1	YES	1-Jul	
Experiment 4	3	5	10	1			
Experiment 5	38	5	10	1	YES	1-Jul	1-Jul
Vary Depth							
Experiment 5	6	5	15	1	YES	22-Jun	26-Jun
Experiment 6	6	5	10	1			
Experiment 7	6	5	5	1	YES	28-Jun	28-Jun

Experiment 8	12	5	15	1		
Vary Turbidity						
Experiment 9	6	10	10	1		
Experiment10	6	15	10	1		
Vary Alum						
Experiment11	6	5	10	0		
Headloss						
Experiment12	Empty Column					
Pre-Treat						
Experiment13	6	5	10	1	YES	1-Jul

Team Reflections

The past two weeks have been a great trial and error learning experience for the Foam Filtration subteam.

To test the limits of foam filtration, we ran an experiment at 18mm/s. The experiment ran for an hour before an abundance of air bubbles appeared in our filter column. We hypothesize that the pressure difference between the top and bottom of our sponge filter was too great, which either caused dissolved air in the water to be pulled out, or air to seep through tubing connections. Another issue with this flow rate was that turbidity readings never fell below 1NTU even after 1 hour. The ripening time of our other experiments have been below 1 hour. This experiment was repeated 3 times with the same results. We came to the conclusion that this experiment's problems were not realistic to solve, given the effluent turbidity results, and instead we will continue to test slower velocities to determine what flow rates our experimental design can handle.

Recently, our main setback has been technical problem with our influent raw water and its turbidimeter. Some of our experiments must be repeated because our influent raw water turbidimeter became clogged earlier in the semester with large chunks of algae, which was causing the turbidimeter readings to shift wildly between 1.5 and 60 NTU. This turbidimeter was cleaned, and one of the experiments we ran when the turbidimeter was clogged will be rerun to see if the turbidimeter was giving accurate readings, despite the clog.

We have also had issues with a third turbidimeter we brought up that was previously used at the pilot plant. One of the turbidimeters was not giving accurate readings. When a sample of clean distilled water was placed for a reading, it was reading values about 2 NTU. As a result, we replaced this turbidimeter. Large amounts of growth occurred in all the fittings of the replacement turbidimeter, and resulted in large pieces being pushed through into the turbidimeter, resulting in inaccurate readings. All fittings have been thoroughly cleaned, and this will hopefully cease to be a problem.

The aluminum hydroxide pretreatment experiments were one of the ones affected by the faulty turbidimeter. We predicted the results of this experiment to be superior to the experiment lacking the wash, however our results were worse. The turbidimeter was one variable for the experiments failure, but another problem we need to work on is how to standardize soaking the sponges in aluminum hydroxide. To regulate the chemical dose, we have discussed fully submerging the foam in a specific concentration of aluminum hydroxide, as well as soaking and then drying the sponge to ensure the chemicals remain on the sponge. These issues will be resolved through more testing.

Overall, our problems taught us something about our experiment and gave us more insight on what we need to consider if foam filtration were to one day be applied to Honduras filtration plants.