

# ANSYS WB - Bike Crank - Problem Specification


Author: Benjamin Mullen, Cornell University

## Problem Specification

1. Pre-Analysis & Start-Up
2. Geometry
3. Mesh
4. Setup (Physics)
5. Solution
6. Results
7. Verification & Validation


## Problem Specification

A bicycle crank is fitted with a strain gauge and a 100 lb force is applied. The bicycle crank's material is aluminum 6061-t6, the Young's modulus is 10,000 ksi, and the Poisson's Ratio is .33. The dimensions (in inches) of the bike crank are shown below.

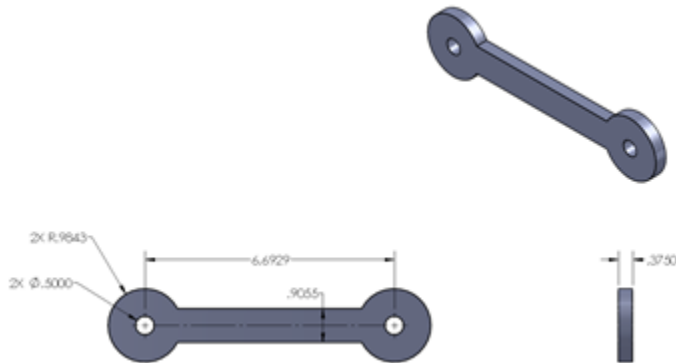

[Click here to enlarge the image](#)

The bicycle crank is loaded such that the fitting on the right is fixed while the fitting on the left is loaded with a 100 lb force.

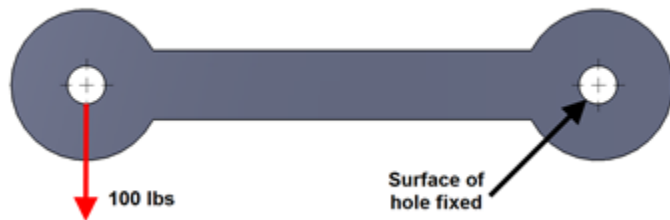

Using hand calculations and ANSYS Workbench, determine the strain measured by a 5.64 mm strain gauge centered at (3.3748, -0.09409, .375) away from the force and aligned in the y-direction.

[Go to Step 1: Pre-Analysis & Start-Up](#)

[Go to all ANSYS Learning Modules](#)

[See and rate the complete Learning Module](#)