## ANSYS AIM Permanent Magnetic Circuit with Air Gap - Pre-Analysis & Start-Up

Authors: Joshua Wallace & Steve Scampoli, ANSYS Inc.

**Problem Specification** 

- 1. Pre-Analysis & Start-Up
- 2. Geometry
- 3. Physics Setup
- 4. Numerical Solution/Results

## Pre-Analysis & Start-Up

## Governing Equation

Magnetostatics is the study of magnetic fields in devices where the magnetic field is generated from DC (steady) currents and/or permanent magnets. Magnetostatics is a special case of Maxwell's equations, which form the basis of electromagnetism.

For magnetostatics the electric field inside of a current carrying coil is completely decoupled from the magnetic field, and the following Maxwell's equations are solved for magnetostatics -

$$\nabla \times \boldsymbol{H} = \boldsymbol{J}$$

$$\nabla \cdot \mathbf{B} = 0$$

$$\mathbf{B} = \mu_0 \mu_r(\mathbf{H}) \cdot \mathbf{H}$$

Where denotes divergence, H is the magnetic field intensity, J is the current density, and B is the magnetic flux density.


## Start-Up

Start up

A few words on the formatting on the following instructions:

- 1. Notes that require you to perform an action are colored in blue
- 2. General information will be colored in black, but do not require any action
- 3. Words that are bolded are labels for items found in ANSYS AIM
- 4. Most important notes will be colored in red

Now that the the pre-calculations are finished, we are ready to begin the simulation in ANSYS AIM. Open ANSYS AIM by going to **Start > AII Apps > ANSYS AIM 18.2**. Once starting page has opened, select the Magnetics template as shown below.

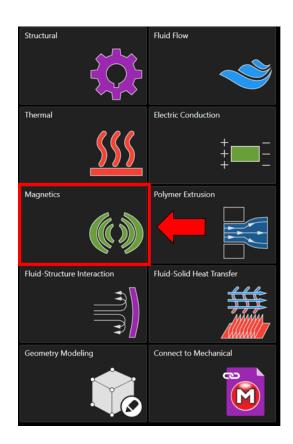

Go to Step 2: Geometry

Go to all ANSYS AIM Learning Modules