

FLUENT - Unsteady Flow Past a Cylinder

This page has been moved to <https://courses.ansys.com/index.php/courses/unsteady-flow-past-a-cylinder/>
Click in the link above if you are not automatically redirected in 10 seconds.

Authors: John Singleton and Rajesh Bhaskaran, Cornell University

[Problem Specification](#)

[1. Pre-Analysis & Start-Up](#)

[2. Geometry](#)

[3. Mesh](#)

[4. Physics Setup](#)

[5. Numerical Solution](#)

[6. Numerical Results](#)

[7. Verification & Validation](#)


[Exercises](#)

[Comments](#)

Unsteady Flow Past a Cylinder

Created using ANSYS 13.0

Problem Specification

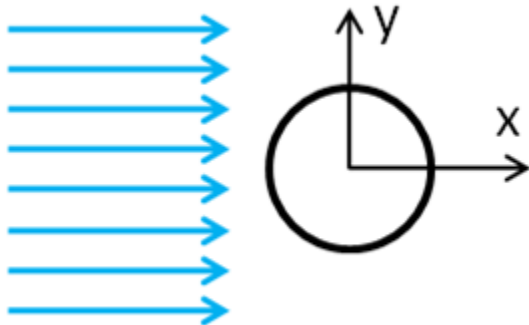

Consider the unsteady state case of a fluid flowing past a cylinder, as illustrated above. For this tutorial we will use a Reynolds Number of 120. In order to simplify the computation, the diameter of the cylinder is set to 1 m, the x component of the velocity is set to 1 m/s and the density of the fluid is set to 1 kg/m³. Thus, the dynamic viscosity must be set to 8.333x10⁻³ kg/m*s in order to obtain the desired Reynolds number.

Compared to the steady case, the unsteady case includes an additional time-derivative term in the Navier-Stokes equations:

$$\frac{\partial \rho \vec{U}}{\partial t} + \rho (\vec{U} \cdot \nabla) \vec{U} = -\nabla p + \mu \nabla^2 \vec{U} \quad (1)$$

The methods implemented by FLUENT to solve a time dependent system are very similar to those used in a steady-state case. In this case, the domain and boundary conditions will be the same as the Steady Flow Past a Cylinder. However, because this is a transient system, initial conditions at t=0 are required. To solve the system, we need to input the desired time range and time step into FLUENT. The program will then compute a solution for the first time step, iterating until convergence or a limit of iterations is reached, then will proceed to the next time step, "marching" through time until the end time is reached.

[Go to Step 1: Pre-Analysis & Start-Up](#)

[Go to all FLUENT Learning Modules](#)