

# FLUENT - Flow over an Airfoil- Step 5

## Problem Specification

1. Create Geometry in GAMBIT
2. Mesh Geometry in GAMBIT
3. Specify Boundary Types in GAMBIT
4. Set Up Problem in FLUENT

## 5. Solve!

## 6. Analyze Results

## 7. Refine Mesh

## Problem 1


## Problem 2

## Step 5: Solve!

### Solve > Control > Solution

Take a look at the options available.

Under *Discretization*, set *Pressure* to *PRESTO!* and *Momentum* to *Second-Order Upwind*.

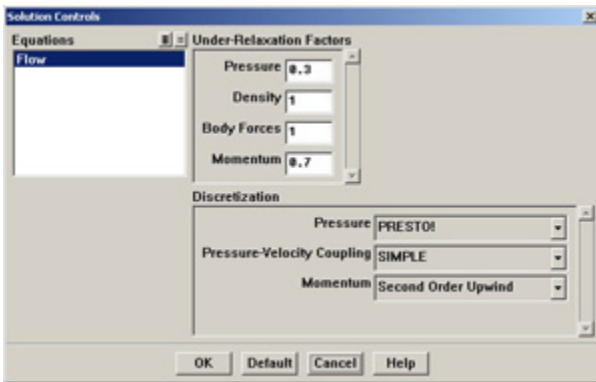


(click picture for larger image)

Click *OK*.

### Solve > Initialize > Initialize...


As you may recall from the previous tutorials, this is where we set the initial guess values (the base case) for the iterative solution. Once again, we'll set these values to be equal to those at the inlet (to review why we did this look back to the tutorial about CFG programs) . Select *farfield1* under *Compute From*.

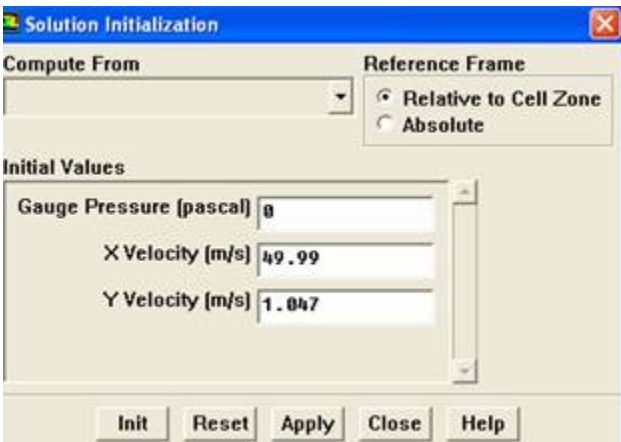

Click *Init*.

### Solve > Monitors > Residual...

Now we will set the residual values (the criteria for a good enough solution). Once again, we'll set this value to 1e-06.

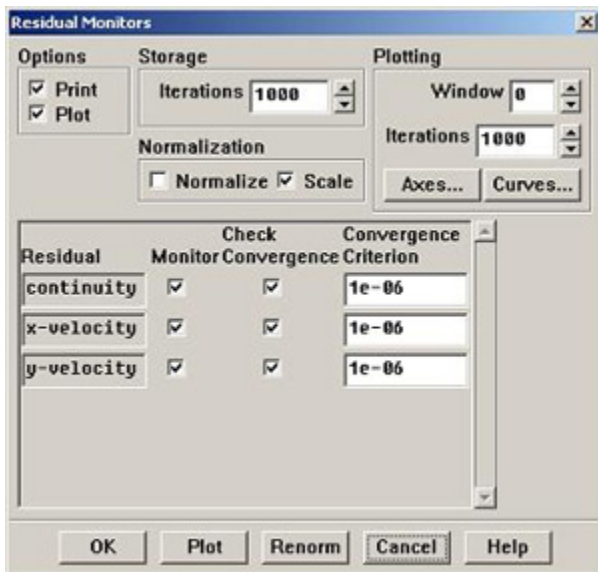


(click picture for larger image)

Click **OK**.

#### Solve > Monitors > Force...

Under **Coefficient**, choose **Lift**. Under **Options**, select **Print** and **Plot**. Then, Choose **airfoil** under **Wall Zones**.

Lastly, set the **Force Vector** components for the lift. The lift is the force perpendicular to the direction of the freestream. So to get the lift coefficient, set **X** to  $-\sin(1.2^\circ) = -0.020942$  and **Y** to  $\cos(1.2^\circ) = 0.9998$ .

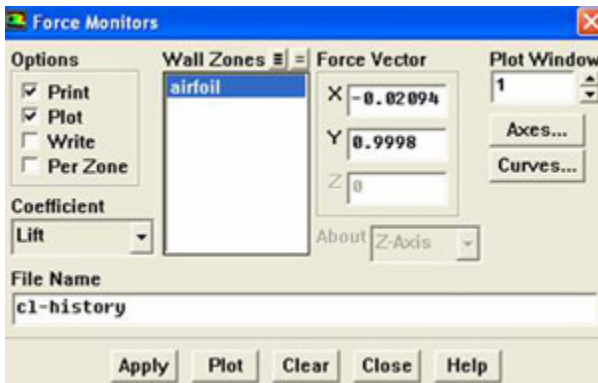


(click picture for larger image)

Click **Apply** for these changes to take effect.

Similarly, set the **Force Monitor** options for the **Drag** force. The drag is defined as the force component in the direction of the freestream. So under **Force Vector**, set **X** to  $\cos(1.2^\circ) = 0.9998$  and **Y** to  $\sin(1.2^\circ) = 0.020942$ . Turn on only **Print** for it.

#### Report > Reference Values

Now, set the reference values to set the base cases for our iteration. Select **farfield1** under **Compute From**.

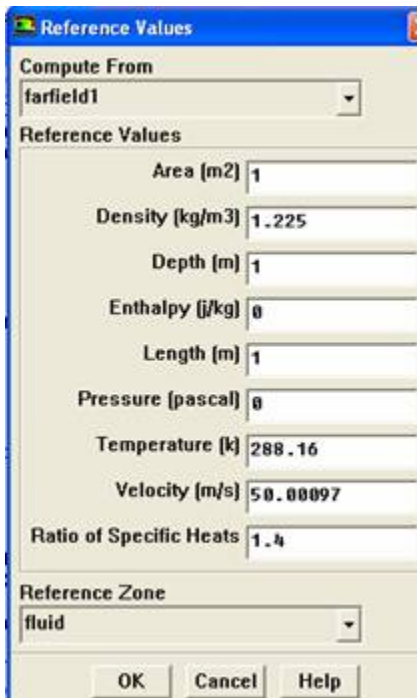

The image shows the 'Reference Values' dialog box in ANSYS FLUENT. The 'Compute From' dropdown is set to 'farfield1'. The 'Reference Values' section contains the following fields: Area (m2) set to 1, Density (kg/m3) set to 1.225, Depth (m) set to 1, Enthalpy (J/kg) set to 0, Length (m) set to 1, Pressure (pascal) set to 0, Temperature (K) set to 288.16, Velocity (m/s) set to 50.00097, and Ratio of Specific Heats set to 1.4. The 'Reference Zone' dropdown is set to 'fluid'. At the bottom are 'OK', 'Cancel', and 'Help' buttons.

Parameter	Value
Area (m2)	1
Density (kg/m3)	1.225
Depth (m)	1
Enthalpy (J/kg)	0
Length (m)	1
Pressure (pascal)	0
Temperature (K)	288.16
Velocity (m/s)	50.00097
Ratio of Specific Heats	1.4

Click **OK**.

*Note that the reference pressure is zero, indicating that we are measuring gage pressure.*

**Main Menu > File > Write > Case...**

Save the case file before you start the iterations.

**Solve > Iterate**

Make note of your findings, make sure you include data such as;

What does the convergence plot look like?

How many iterations does it take to converge?

How does the Lift coefficient compared with the experimental data?

**Main Menu > File > Write > Case & Data...**

Save case and data after you have obtained a converged solution.

Go to [Step 6: Analyze Results](#)

[See and rate the complete Learning Module](#)

Go to [all FLUENT Learning Modules](#)